


3.5" SubCompact Board with Intel® Core Ultra 5 or Core Ultra 7 processor

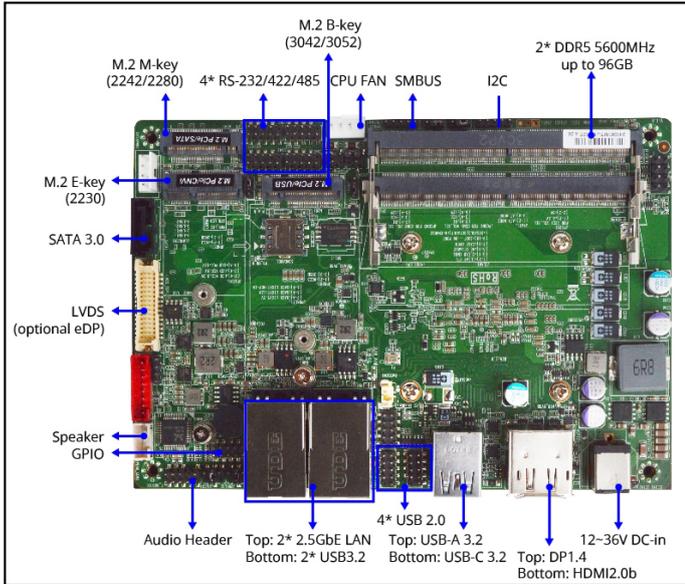

Features

- **Powered by Intel® Core Ultra SoC processor (Arrow Lake):** With integrated NPU for AI acceleration
- **High-Speed Memory:** Supports dual-channel DDR5 6400MT/s CSO-DIMM with maximum capacity of 128GB
- **Muti-Display:** Supports four independent displays, up to 4K@60Hz
- **Dual Intel® 2.5GbE LAN:** Supports TSN, Redundancy, and High-speed connectivity
- **Storage and Expansion:** 1x SATA III, 1x M.2 E-Key, 1x M.2 M-Key, 1x M.2 B-Key, and 1x Nano SIM slot, support RAID
- **Comprehensive I/O:** 1x USB 3.2 Gen2x2, 3x USB 3.2 Gen 2, 4x USB 2.0, and 4x COM ports. (USB3.2 type-C colay DP)
- **Wide-Range DC Input:** 12–36V for industrial applications

Packing List

PART NUMBER	DESCRIPTION	QTY
F35-ARU1	F35-ARU1	1
G01-COM-H2M20-1F	COM Cable	2
G01-SATA3-BL-1F	SATA Cable	1
G01-PW4PS2S-322-1F	SATA Power Cable	1
F05-JF35-04-F	Heat Sink(assembled)	1
F07-FN606010-F	FAN(assembled)	1


Optional Accessory

PART NUMBER	DESCRIPTION	QTY
G01-COM-H2M20-1F	COM cable	1

Specifications

SYSTEM	
MB FORM FACTOR	3.5"
CPU	Onboard Intel® Core™ Ultra 5 Processor 225U (Formerly Arrow Lake-U, TDP 15W) Onboard Intel® Core™ Ultra 7 Processor 255U (Formerly Arrow Lake-U, TDP 15W) For additional compatible CPUs, please contact regional sales
CHIPSET	Intel® SoC
MEMORY	2 x DDR5 6400MT/s, Dual Channel CSO-DIMM, up to 128GB
BIOS	UEFI
WAKE ON LAN	Yes
WATCHDOG TIMER	255 Levels
SECURITY	TPM2.0 (dTPM, Optional)
RTC BATTERY	Lithium Battery
DIMENSION (W X D)	148.0 (W) x 102.0 (D) mm (5.8" x 4.0")
OS SUPPORT	Windows® 11 (64bit), Windows® 10 (64bit), Linux
POWER	
POWER REQUIREMENT	DC-in 12-36V
POWER ON MODE	AT / ATX (Default) Mode
CONNECTOR	DC Jack
DISPLAY	
GPU	Intel® Graphics
LVDS	1 x 24-bit Dual Channel LVDS (Max. Resolution: 1920 x 1200 @60Hz, co-layout eDP)
Type-C DP	1 x Type-C DP 1.4 (Max Resolution: 3840 x 2160@60Hz)
DP	1 x DP1.4 (Max Resolution: 3840 x 2160@60Hz)
HDMI®	1 x HDMI 2.0b (Max Resolution: 3840 x 2160@60Hz)
MULTIPLE DISPLAY	Support 4 Displays
AUDIO	
CODEC	Realtek Audio Codec
COMBO	1 x Internal Header
AMPLIFIER	3W
LAN	
ETHERNET	1 x RJ45 for Intel® I226-V 2.5GbE 1 x RJ45 for Intel® I226-LM 2.5GbE
USB PORT	
USB	1 x USB 3.2 Gen 2x2 Type-C (20Gbps) 3 x USB 3.2 Gen 2x1 (10Gbps, Formerly USB 3.1 Gen 2) Internal Header for 4 x USB 2.0
SERIAL PORT	
COM	Internal Header for 4 x RS-232/422/485
INTERNAL I/O	
GPIO	8-Bit
SMBUS	Yes
I2C	Yes
FAN	1 x 4-pin Connector for CPU Fan (PWM Mode)
FRONT PANEL	HDD Active LED, Power LED, Power On/Off, Reset
ADDITIONAL	1 x Chassis intrusion 1 x AT/ATX Mode Selection
STORAGE	
SATA	1 x SATA III 1 x SATA Power Connector
RAID	RAID 0/1
EXPANSION	
M.2	1 x E-Key 2230 (USB 2.0/PCIe 3.0 x1) Support CNVio 1 x B-Key 3042/3052 (USB 3.2/PCIe 3.0 x2) 1 x M-Key 2242/2280 (PCIe 4.0 x4 / SATA III) Support NVMe
SIM	1 x Nano SIM Card Slot
ENVIRONMENT & CERTIFICATION	
OPERATING TEMPERATURE	-20°C - 60°C (-4°F - 140°F)
STORAGE TEMPERATURE	-20°C - 85°C (-4°F - 185°F)
OPERATING HUMIDITY	10 - 90% relative humidity, non-condensing
CERTIFICATION	CE/FCC Class A

Dimension Unit: mm

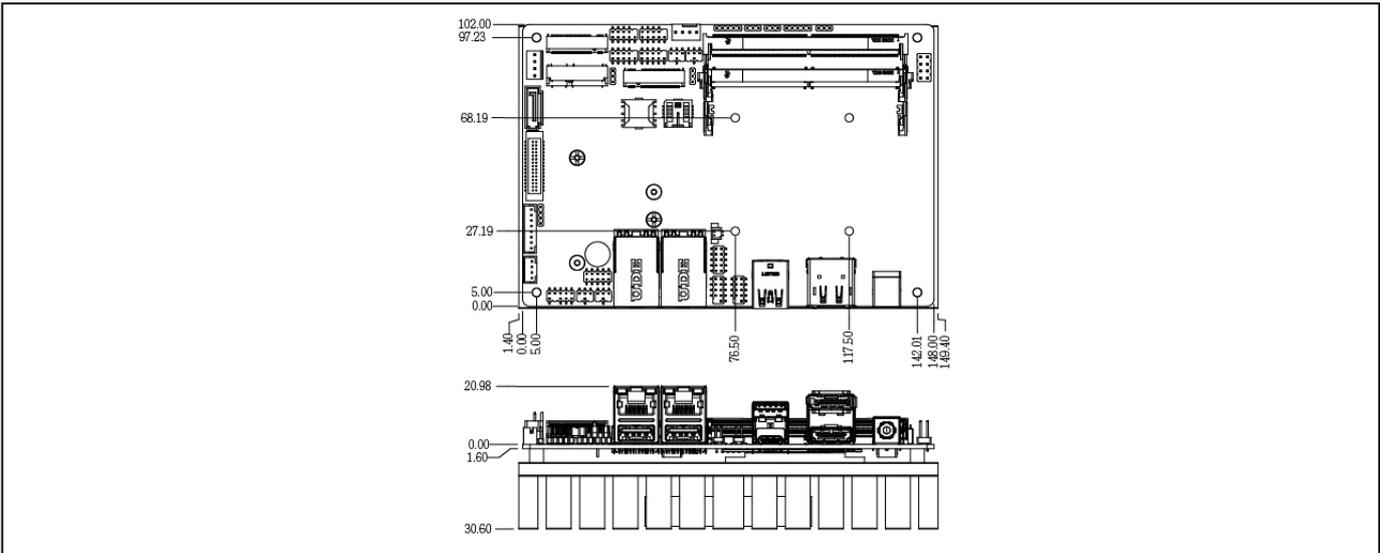

Ordering Information

PART NUMBER	F35-ARU1-225U0020	F35-ARU1-225U0220	F35-ARU1-255U0020	F35-ARU1-255U0220
CPU	Intel® Core™ Ultra 5 225U	Intel® Core™ Ultra 5 225U	Intel® Core™ Ultra 7 255U	Intel® Core™ Ultra 7 255U
SECURITY	Intel® PTT (fTPM)	TPM 2.0 (dTPM)	Intel® PTT (fTPM)	TPM 2.0 (dTPM)