


HB368F21-6210-S



3.5"

Compact Fanless Embedded System with Intel® J6210 Processor, supports DC-in 12~36V and wide temperature range 20°C ~ 60°C

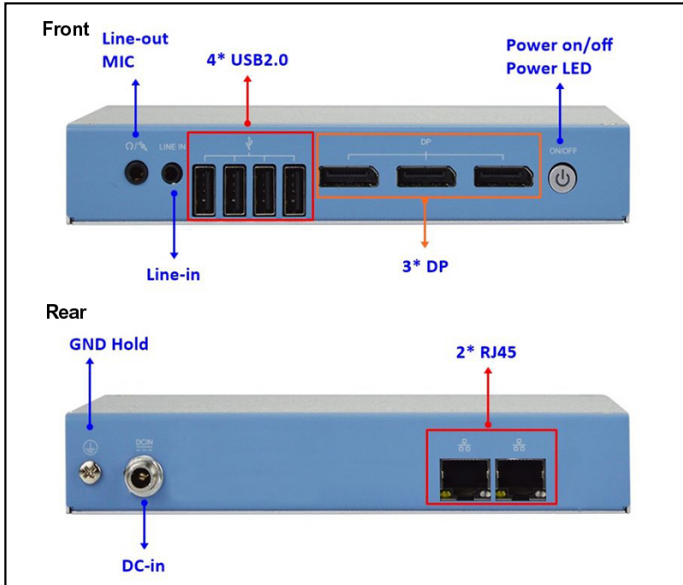

Features

- **Efficient Processing:** Powered by Intel® J6210 SoC Processor (Elkhart Lake, TDP 6.5W)
- **Triple Display Support:** Equipped with 3 x DisplayPort outputs supporting 4K resolution
- **Storage & Expansion:** Optional eMMC, 1 x M.2 E-Key, 1 x M.2 M-Key, 1 x M.2 B-Key, and 1 SIM card slot
- **Compact Fanless Design (Only 27mm Height):** Supports Wall Mount and DIN Rail for Space-Saving Installation
- **Enhanced Security:** Optional TPM 2.0
- **Wide Range DC-In:** Supports 12~36V input for versatile power options


Packing List

PART NUMBER	DESCRIPTION	QTY
HB368F21-6210-S Series	HB368F21-6210-S Series	1
HCSFBMWM01B-F	WALL MOUNT KITS	1
HCS3XXDINRAILPS-F	DIN RAIL KITS	1
L01AS051-F	Adapter DC12V_40W	1
Change according to shipping area	Power cord	1
LCSCHBJC3XX-F	Screw Pack	1
J05-ANT-GX57245-F	Antenna 2G4/5G 2.8dBi (WiFi only)	1

Specifications

SYSTEM	
MB FORM FACTOR	Performance
CPU	Onboard Intel® Celeron® Processor N6210 (Formerly Elkhart Lake, TDP 6.5W) For additional compatible CPUs, please contact regional sales
CHIPSET	Intel® SoC
MEMORY	1 x DDR4 3200MHz, Single Channel SO-DIMM, up to 32GB
BIOS	AMI Flash ROM
WATCHDOG TIMER	255 Levels
SECURITY	TPM2.0 (Optional)
OS SUPPORT	Windows® 10 (64bit) Windows® 11 (64bit) Linux
POWER	
POWER REQUIREMENT	DC-in 12-36V 40W Adapter: AC90-240V, DC12V/3.3A
POWER ON MODE	AT / ATX (Default) Mode
DISPLAY	
GPU	Intel® HD Graphics, shared memory
DP	3 x DP (Max Resolution: 4096*2160@60Hz)
MULTIPLE DISPLAY	Support 3 Displays
LAN	
ETHERNET	2 x RJ45 for Realtek® RTL81191 GbE
SYSTEM I/O	
REAR PANEL I/O	2 x RJ45 1 x DC12-36V 1 x GND Hold
FRONT PANEL I/O	1 x Power Button 1 x Power LED 4 x USB 2.0 1 x Line-out 1 x MIC-in 1 x Line-in 3 x DP
STORAGE	
eMMC	Onboard 64GB eMMC 5.1 (optional)
EXPANSION	
M.2	1 x M-key 2242/2280 (PCIe Gen.3x2/SATA interface) Support NVME 1 x E-Key 2230 (USB 2.0/PCIe 3.0 x1) 1 x B-key 3042 (USB3.0 interface)
SIM	1 x SIM Card Slot
MECHANICAL	
MOUNTING	Wall Mount, DIN Rail Clip
DIMENSIONS (W x H x D)	160.2 (W) x 106.0 (D) x 27.0 (H) mm
GROSS WEIGHT	1.12 kg
NET WEIGHT	0.61 kg
ENVIRONMENT & CERTIFICATION	
SHOCK	15G, 11ms duration
VIBRATION	1 Grms/ 5- 500Hz/ Operation
OPERATING TEMPERATURE	-20°C ~ 60°C (-4°F ~ 140°F)
STORAGE TEMPERATURE	-40°C ~ 85°C (-40°F ~ 185°F)
OPERATING HUMIDITY	10 ~ 95% @ 40°C, Non-condensing
STORAGE HUMIDITY	0 ~ 95% Relative Humidity, Non-condensing
CERTIFICATION	CE/FCC Class A LVD
ESG DECLARATION	EU RoHS China RoHS ErP

Dimension Unit: mm

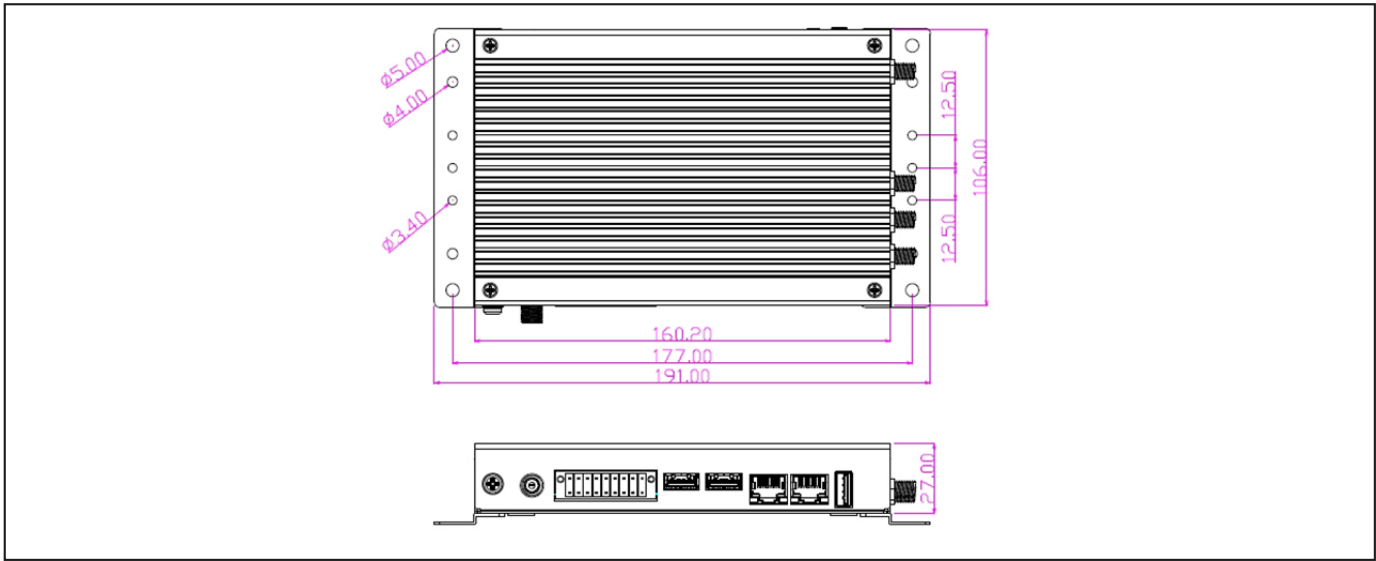

Ordering Information

PART NUMBER	HB368F21-6210-S	HB368F21I-6210-S
CPU	Intel® Celeron® N6210	Intel® Celeron® N6210
POWER REQUIREMENT	DC-in 12-36V	DC-in 12-36V
GPU	Intel® HD Graphics, shared memory	Intel® HD Graphics, shared memory
DP	3 x DP (Max Resolution: 4096*2160@60Hz)	3 x DP (Max Resolution: 4096*2160@60Hz)
MULTIPLE DISPLAY	Support 3 Displays	Support 3 Displays
ETHERNET	2 x GbE	2 x GbE
I/O	2 x RJ45	2 x RJ45
I/O	4 x USB 2.0	4 x USB 2.0
I/O	1 x Power Button + Power LED	1 x Power Button + Power LED
I/O	1 x DC Jack	1 x DC Jack
I/O	1 x Audio (Line-out, MIC)	1 x Audio (Line-out, MIC)
I/O	1 x Line-in	1 x Line-in
I/O	1 x GND Hold	1 x GND Hold
M.2	1 x M-Key 2242/2280	1 x M-Key 2242/2280
M.2	1 x E-Key 2230	1 x E-Key 2230
M.2	1 x B-Key 3042	1 x B-Key 3042
OTHER		WiFi
OPERATING TEMPERATURE	-20°C ~ 60°C (-4°F ~ 140°F)	-20°C ~ 60°C (-4°F ~ 140°F)