

HBJC150LI22-H420B

Intel® 10th/11th LGA1200 Socket Processor, DDR4 3200 MHz up to 64GB

Features

1. Intel® LGA1200 Socket support 10th/11th Gen Core™ Processor
2. Support 2* DDR4 3200/2933MHz SO-DIMM up to 64 GB
3. 4* USB3.2 (Gen2), 2* USB3.2 (Gen1), 2* USB2.0, 2* COM
4. , 1* HDMI , 1* DP, 1* VGA, 2* RJ45, 1* MIC, 1* Line out , Line in
5. M/B Form Factor : Mini ITX (170x170mm)
6. 1U FLEX 250W ATX Power
7. Support TPM2.0 (option)




intel. FC CE RoHS COMPLIANT

Front I/O




Rear I/O

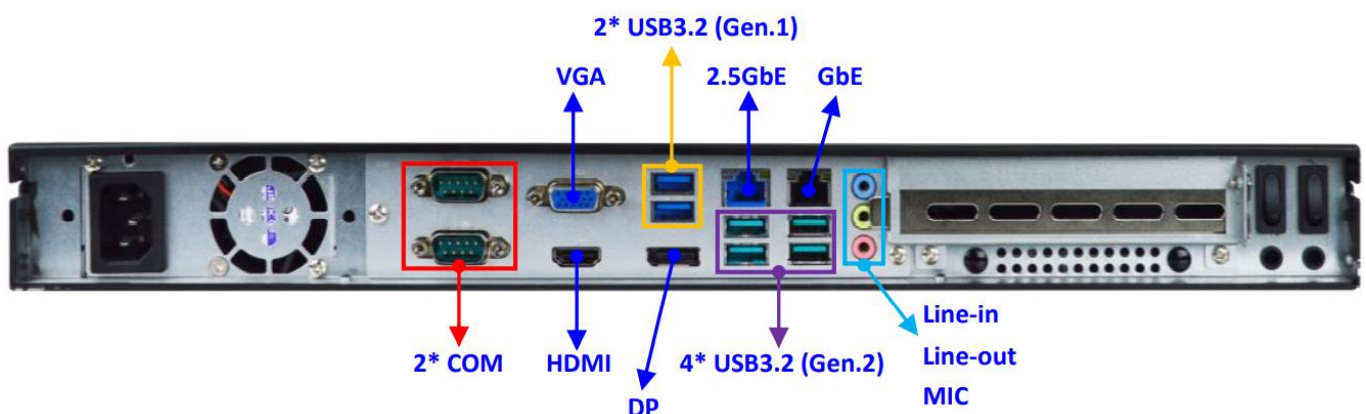


Specifications

Model <ul style="list-style-type: none"> • HBJC150LI22-H420B (non-Wifi) • HBJC150LI22I-H420B (M.2 ac Wifi) 	CPU / Chipset Intel® 10 th /11 th LGA 1200 Socket Core i7/i5/i3/Pentium/Celeron Processor (Max. 65W TDP)
BIOS AMI Flash ROM	Memory 2* DDR4 3200/2933MHz SDRAM SO-DIMM up to 64GB
Network 1* Intel i219-LM GbE 1* Intel i226-V 2.5GbE	Graphics <ul style="list-style-type: none"> • Intel® HD Graphics, shared memory, Support Dual Displays • 1* VGA (Max Resolution: 1920x1080@60Hz) • 1* HDMI 1.4 (Max Resolution: 4096x2160@30Hz) • 1* DP1.4 (Max Resolution: 5120x3200@60Hz) Support Dual Display
Storage <ul style="list-style-type: none"> • 2* 2.5" SATA Device • 1* M.2 M-key (2242/2280, PCIe x4 interface) support NVMe SSD 	Expansion 1* M.2 E-key (2230, PCIe x1/USB2.0 interface) support CNVi for Wifi/BT 1* PCIe x16 slot
Rear Panel I/O <ul style="list-style-type: none"> • 2* RJ45 • 1* DP • 1* HDMI • 1* VGA • 2* COM (RS232/422/485) • 4* USB3.2 (Gen.2) • 2* USB3.2 (Gen.1) • 1* Line-in, 1* Line-out, 1* MIC 	Front Panel I/O <ul style="list-style-type: none"> • 1* Power button, 1* Reset button • 1* Power LED, 1* HDD LED • 2* USB2.0
Internal Connector N.A.	Power Source <ul style="list-style-type: none"> • 1U FLEX 250W ATX POWER • AC 90~240V input
Compliance CE, FCC, RoHS, ErP Ready	Dimensions System: 430 (W) x 252 (D) x 44 (H) mm Color Box dimension: 560 (W) x 400 (D) x 380 (H) mm
Temperature <ul style="list-style-type: none"> • Operating Temperature: 0 ~ 50° C • Storage Temperature: -10 ~70° C • Humidity: 10% ~ 90% RH @40°C (non-condensing) • 	
OS Support Windows 11, Linux	
Warranty 2 Years limited warranty * Specifications subject to change without notice, not responsible for typographical errors. Does not include HDD or OS.	

Part Number Rules

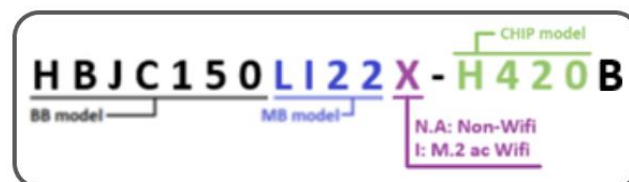

Mechanical Drawings (Unit=mm)

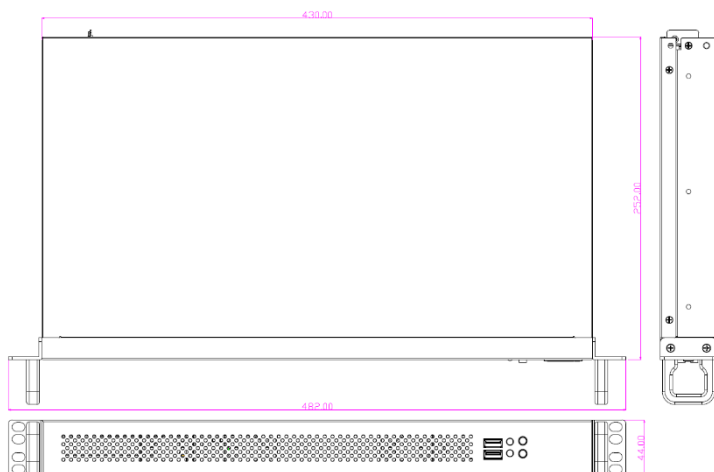

Standard Accessories

Part Number	Description
-----	HBJC150LI22 Series
Change according to shipping area	Power cord
LCSCJC150-F	JC150 1U CASE Screw Pack
G01-SATA3-BL-1F	SATA3 CABLE L=50cm
F07-FN959528-F	95*95*28mm CPU Cooler FAN
J2PCIE16RISER1AR10	PCI-E X16 RISER CARD