



Fanless Embedded System With POE




Specifications:

■ Product Dimension	■ 264 (W) * 199.4 (D) * 38 (H) mm
■ Product Model	■ HBJC512F3DG-1900-B / HBJC512F3DGW-1900-B
■ MB Model & Size	■ JNF3DP-1900 / 3.5" SBC
■ BIOS	■ AMI UEFI
■ CPU	■ Intel® Bay Trail-D 1900 SoC Processor
■ Memory	■ Onboard 4GB DDR3L 1333Mhz
■ Storage Space	■ 1 * 2.5" SATA Device bay
■ Colors	■ Black
■ Front I/O Port	<ul style="list-style-type: none"> ■ 1 * 4 PIN AC Input ■ 1 * AC ON-OFF ■ 1 * Power LED ■ 1 * Power SW ■ 2 * USB 2.0
■ Rear I/O Port	<ul style="list-style-type: none"> ■ 1 * USB3.0, 3 * USB2.0 ■ 1 * DVI-I (Max. Resolution: 1920x1200@60Hz) ■ 2 * Giga LAN Ports ■ 1 * Line-out ■ 2 * WiFi Ports (HBJC512F3DGW-1900-B only)
■ POE Port	<ul style="list-style-type: none"> ■ 4 * 10/100M/1000M Base-TX RJ45 Ports ■ Conforms to IEEE802.3af, IEEE802.3at ■ IEEE802.3x Flow control ■ IEEE 802.3x full-duplex flow control, per port up to 23W ■ For Switch: Marvell 88E6176 ■ For PoE: MAX5980

■ Power Source	<ul style="list-style-type: none"> ■ 150W AC to DC OP Power inside ■ AC 90~240V input
■ Accessory	<ul style="list-style-type: none"> ■ 1 * AC Cable ■ 1 * 4 Pin Terminal block con ■ 1 * Screw package
■ Packing	<ul style="list-style-type: none"> ■ Net Weight : 3.6KG ■ Gross Weight : 4.5KG ■ Color Box Dimension : 406 (W) x 148 (D) x 359 (H) mm
■ Temperature	<ul style="list-style-type: none"> ■ Operating within 0~50 centigrade ■ Storage within -10~70 centigrade
■ Certification	<ul style="list-style-type: none"> ■ EMC : CE , FCC ■ Safety : RoHS , ErP
■ Applications	<ul style="list-style-type: none"> ■ Industrial Control System ■ Networking Server System ■ Security Industry
■ Warranty	<ul style="list-style-type: none"> ■ 2 Years limited warranty

External I/O :

Front

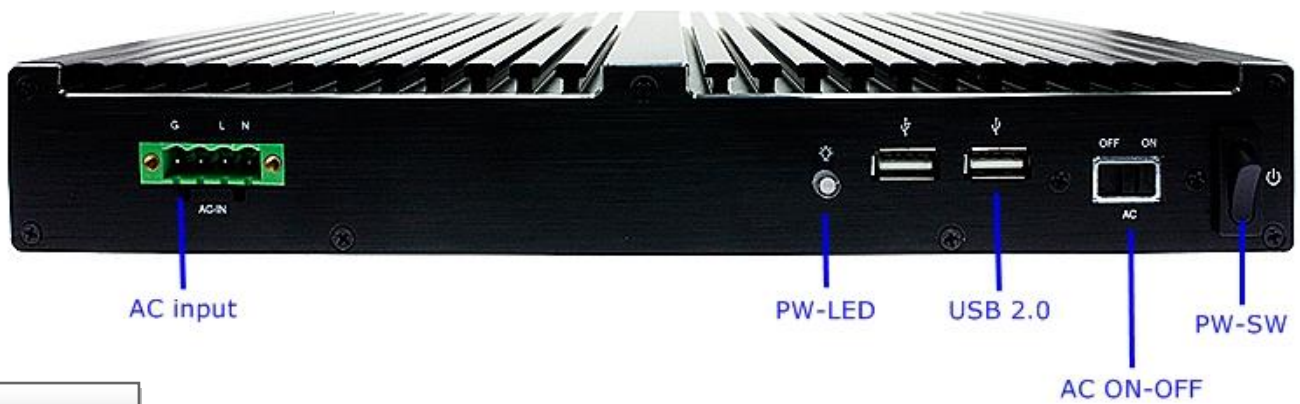

Rear

