



Fanless Embedded System With POE




Specifications:

■ Product Dimension	■ 264 (W) * 199.4 (D) * 38 (H) mm
■ Product Model	■ HBJC512F3DP-1900-B / HBJC512F3DPW1900-B
■ MB Model & Size	■ JNF3DP-1900 / 3.5" SBC
■ BIOS	■ AMI UEFI
■ CPU	■ INTEL® Bay Trail-D 1900 SoC Processor
■ Memory	■ 4GB DRAM on board
■ Storage Space	■ 2.5" SATA Device * 1 (only support 2.5" HDD with a height ≤ 10mm)
■ Colors	■ Black
■ Front I/O Port	<ul style="list-style-type: none"> ■ 4-PIN AC Input * 1 ■ AC ON-OFF * 1 ■ Power LED * 1 ■ Power SW * 1 ■ USB 2.0 * 2
■ Rear I/O Port	<ul style="list-style-type: none"> ■ USB3.0 * 1, USB2.0 * 3 ■ DVI-I * 1 (Max. Resolution: 1920×1200@60Hz) ■ Giga LAN Port * 2 ■ Audio * 1 (Line out) ■ WiFi Port * 2 (HBJC512F3DPW1900-B only)
■ POE Port	<ul style="list-style-type: none"> ■ 100M LAN Port * 4 (DC52.5V-1.94A-102W) ■ Conforms to IEEE802.3, IEEE 802.3u, IEEE802.3af, IEEE802.3at ■ IEEE802.3x Flow control ■ Provides 4 PoE injector, per port DC52.5V-0.48A-25W ■ For Switch: IP178G ■ For PoE : MAX5980

■ Power Source	■ 150W AC-DC OP Power inside ■ AC 90~240V input
■ Accessory	■ AC Cable * 1 ■ 4 Pin Terminal block con * 1 ■ Screw Package * 1
■ Packing	■ Net Weight : 3.6KG ■ Gross Weight : 4.5KG ■ Color Box Dimension: 406 (W) x 148 (D) x 359 (H) mm
■ Temperature	■ Operating within 0~50 °C ■ Storage within -10~70 °C
■ Certification	■ EMC : CE , FCC ■ Safety : RoHS , ErP
■ Applications	■ Industrial Control System ■ Networking Server System ■ Security Industry
■ Warranty	■ 2 Years limited warranty

External I/O :

Front

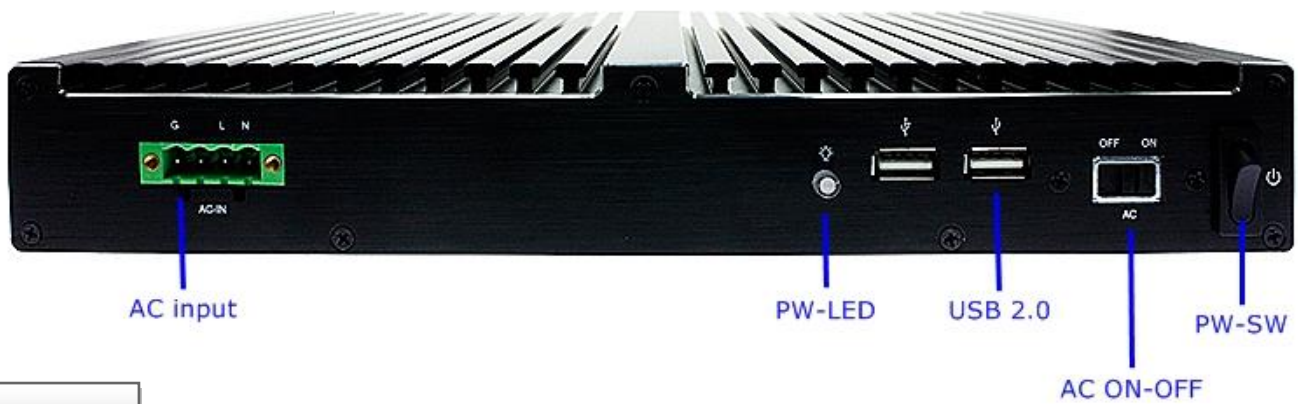

Rear

