



JNLBTA-I1900

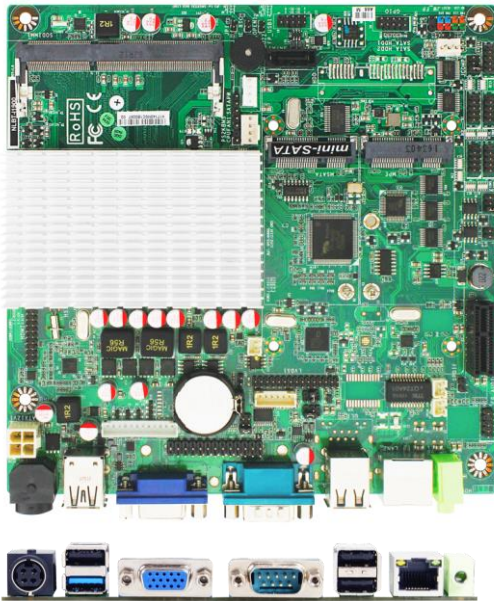

1. Intel Bay Trail J1900 Quad Core processor
2. Support DirectX 11 3D Graphics Acceleration
3. Support DDR3L 1333
4. Support 1* PCI Express GbE
5. Support 1* USB3.0
6. Onboard 1* Mini PCIe connector
7. Onboard 1* mSATA connector
8. 2 Phase CPU Power Support
9. Support Slim hard drive design
10. Support Thunder Protection Function
11. Thin mini ITX Form Factor (170mm X170mm)

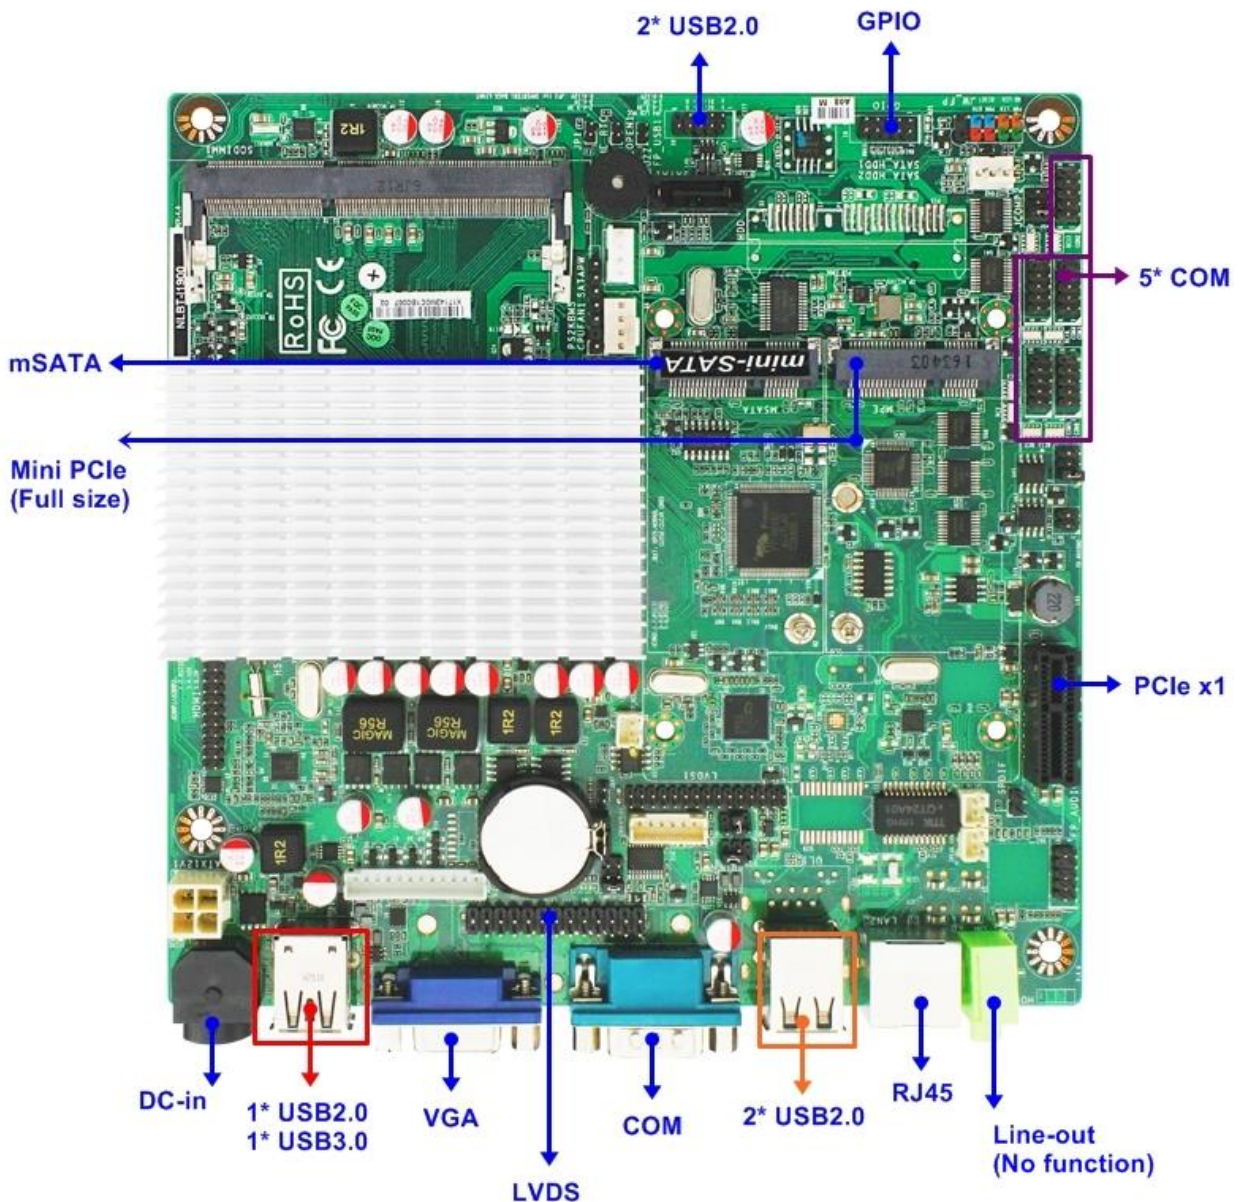

Mainboard Specifications

■ CPU-Chipset	<ul style="list-style-type: none"> ■ Intel® Bay Trail J1900(2.0GHz) Quad Core processor ■ Intel® Bay Trail SOC chipset ■ 2 Phase CPU Power Support
■ I.O Chipset	<ul style="list-style-type: none"> ■ Fintek® F71869A
■ Memory	<ul style="list-style-type: none"> ■ 1* SO-DIMM slot ■ Support DDR3L 1333 ■ Max. capacity of system memory up to 8GB
■ Expansion Slots	<ul style="list-style-type: none"> ■ 1* Mini PCI-E connector ■ 1* PCIe1 slot
■ Storage	<ul style="list-style-type: none"> ■ 1* Serial ATA2 3Gb/s connector ■ 1* mSATA Connector
■ Ethernet LAN	<ul style="list-style-type: none"> ■ Realtek® RTL8111H Chip ■ PCI Express Gigabit LAN
■ LVDS	<ul style="list-style-type: none"> ■ Onboard 24-bit Dual channel
■ USB	<ul style="list-style-type: none"> ■ 5* USB 2.0/1.1(3 distribute in back panel, 2 distribute in mid-board) ■ 1* USB3.0
■ Special Features	<ul style="list-style-type: none"> ■ Support CPU Smart Fan ■ Support Watch dog Technology ■ Support GPIO Technology ■ Support VGA header ■ Support Power On board ■ Support Slim hard drive design ■ Support 1* RS422/RS485 COM header ■ Thunder Protection Function ■ All Solid Capacitor design ■ All Power Pack MOSFET design
■ Back Panel I / O	<ul style="list-style-type: none"> ■ 3* USB 2.0/1.1 ports ■ 1* USB3.0 port ■ 1* RJ-45 port ■ 1* Line-out port ■ 1* VGA port (Max. Resolution: 1920*1080@60Hz) ■ 1* COM port ■ 1* 12V DC in
■ Internal I / O	<ul style="list-style-type: none"> ■ 1* USB 2.0/1.1 headers for 2 USB 2.0/1.1 ports ■ 2* CPU / Chassis Fan connectors ■ 5* COM headers (1* RS422/RS485) ■ 1* PS2/KB header ■ 1* 4-pin ATX 12V Power connector ■ 1* 4-pin SATA Power connector ■ 1* 12-pin VGA header (Max. Resolution: 1920*1080@60Hz)

	<ul style="list-style-type: none"> ■ 1* 20-pin HDMI header (Max. Resolution: 1920*1200@60Hz) ■ 1* 24-bit Dual Channel LVDS header (Max. Resolution: 1920*1200@60Hz) ■ 1* GPIO header ■ 1* Mini PCI-e connector ■ 1* mSATA Connector ■ 1* SATA + Power Connector (7+15Pin)(Option) ■ 1* Audio header (No function) ■ 1* Front panel header ■ 1* HDMI _SPDIF header
■ BIOS	■ AMI 64MB DIP Flash ROM
■ Temperature	<ul style="list-style-type: none"> ■ Operating: 0°C ~ 60°C ■ Storage: -20°C ~ 85°C
■ Form Factor	■ Thin mini ITX Form Factor (170mm X 170mm)

* For further information please visit the website at <http://www.jetway.com.tw>

* The Specification may be changed without further notice.

Standard Accessories

1* SATA Cable	2* COM Cable	I/O Shield
G01-SATAL-RD30-F	G01-COM-H2M22-1F	F04-MB-026-1F