



NMF92-H61



1. INTEL® H61 Chipset
2. Support INTEL® LGA 1155 Socket Core™ i3, i5, i7 & Pentium Processors
3. Support 2 * 240 pin 1333/1066 Dual CH DDR3 SDRAM DIMM Max. up to 16GB
4. Support TPM 1.2 function
5. 1 * Mini PCI-E slot (Selectable W/mSATA)
6. 4 * SATA2 connectors (SATA4 share with mSATA)
7. HDMI, DVI-D and VGA Video Outputs
8. Support 10 * COM ports (COM 10 for RS232/422/485)
9. Support CPU Smart FAN
10. Supports 2 * Gigabit LAN
11. Supports ACPI S3 Function
12. Support Watch dog Technology
13. Micro ATX form factor

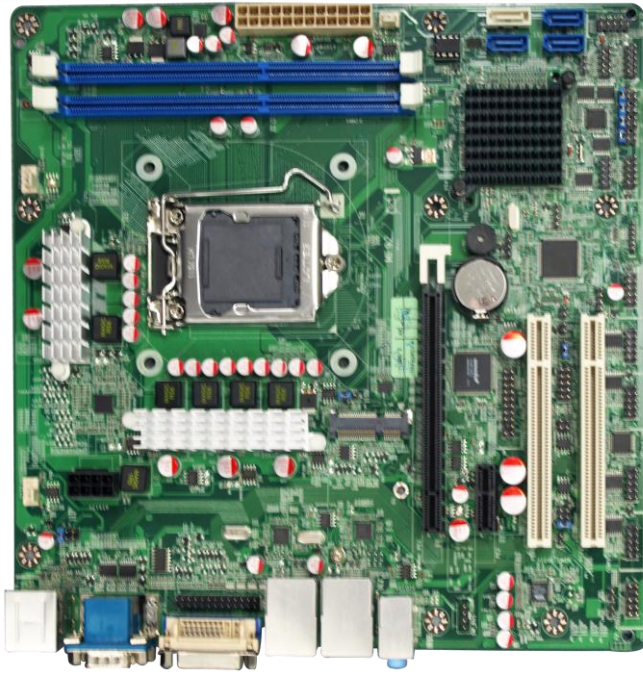

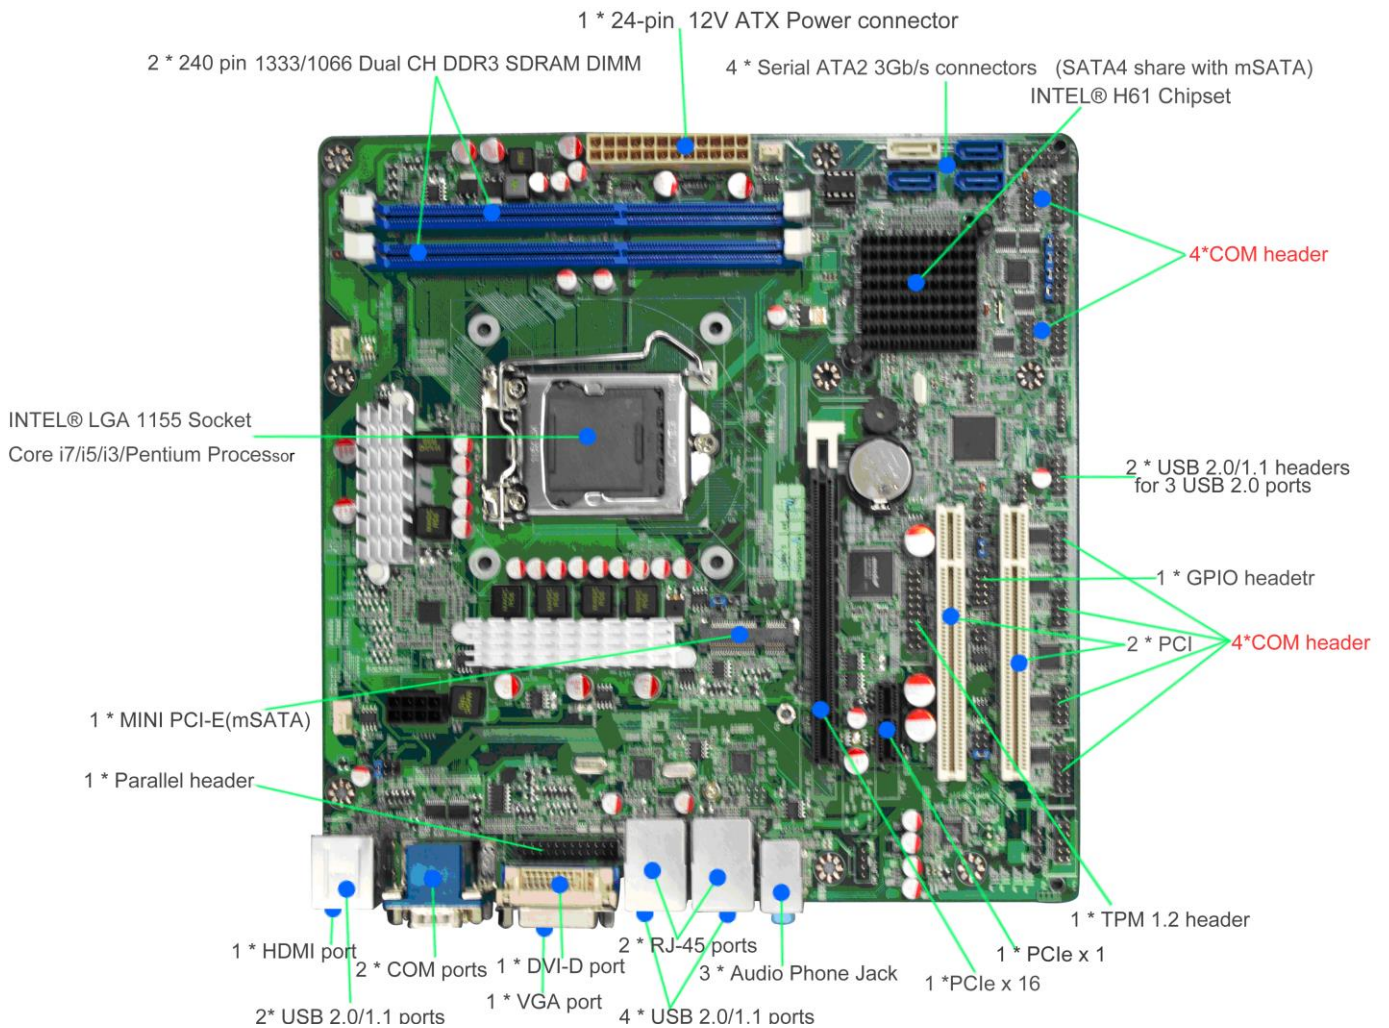


Form Factor	
Dimensions	- Micro ATX (244mm x 244mm)
Processor System	
CPU	- Intel LGA 1155 Socket Core i7/i5/i3/Pentium Processor
Core Number	- (by CPU)
Max Speed	- (by CPU)
L2 Cache	- (by CPU)
Chipset	- Intel H61 Express chipset
BIOS	- AMI 32Mb Flash rom
Expansion Slot	
PCI	- 2
Mini-PCIe	- 1 (share with mSATA)
mSATA	- 1 (share with mPCIe)
PCIe	- 1 x16 + 1 x1
CFast Card Socket	- 0
CF Card Socket	- 0
Memory	
Technology	- 2 * DDR3 1333/1066 MHz Dual CH
Max.	- 16GB
Socket	- 2 x SO-DIMM
Graphics	
Controller	- (by CPU)
VRAM	- Shared Memory
VGA	- 1
LVDS	- 0
HDMI	- 1
DVI-D	- 1
DisplayPort	- 0
MultiDisplay	- Yes (Dual Display)
Ethernet	
Ethernet	- 10/100/1000 Mbps
Controller	- GbE LAN: 2 x RTL8111E
Connector	- 2 x RJ 45
SATA	
Max Data Transfer Rate	- 4 x SATAII(3.0Gb/s)
Rear I/O	

VGA	- 1
DVI-D	- 1
HDMI	- 1
DisplayPort	- 0
Ethernet	- 2
USB	- 6 x USB 2.0
Audio	- 3 (MIC / Line-out / Line-in)
Serial	- 2 (RS-232/422/485 with 5V/12V selectable header)
eSATA	- 0
PS2	- 0
DC-input	- 0
Internal Connector	
USB	- 3 x USB 2.0
PS2	- 1
LVDS / inverter	- 0
VGA	- 0
Serial	- 8 (2 x RS-232 with 5V/12V selectable header)
SATA	- 4 x SATAII (3.0Gb/s)
mPCIe	- 1 (share with mSATA)
Parallel	- 0
mSATA	- 1 (share with mPCIe)
CIR	- 1
GPIO 8-bit	- 4in / 4 out
Chassis intrusion	- 1
Audio Header	- 1
Watchdog Timer	
Output	- From Super I/O to drag RESETCON#
Interval	- 256 segments, 0,1,2...255sec/min
Power Requirements	
Input PWR	- 12V DC-In (24-pin PWR Con)
Power On	ATX Supported - ATX: Press Button to PWR on after Power input ready
Certifications	
Certifications	- CE, FCC, RoHS, REACH
Environment	
Temperature	- Operating: 0°C – 60°C
	- Storage: -20°C – 85°C

*For further information please visit the website at <http://www.jetway.com.tw>

*The Specification may be changed without further notice.

Product Accessories

Manual	CD	SATA Cable	 G01-COM9X3-30A-F x2	 x2	
G03-NMF92-F	G02-DVD29-A1-WF	G01-SATA-BK-B-2F	G01-COM9X3-30A-1F	G01-COM9-30A-1F	F04-278-1-F