

Intel® 10th LGA1200 Socket Processor, DDR4 2666 MHz up to 32GB

Features

1. Intel® 10th LGA1200 Socket Processor (Max. 65W TDP)
2. Support 2* DDR4 2666/2400MHz SO-DIMM up to 32 GB
3. 6 * USB3.1 , 2 * USB2.0 , 2 * COM , 2 * HDMI , 1 * DP , 2 * RJ45 , 1*MIC , 1*Line out , Line in
4. M/B Form Factor : Mini ITX (170x170mm)
5. 1U FLEX 250W Power




intel. FC CE RoHS COMPLIANT

Front I/O




Rear I/O

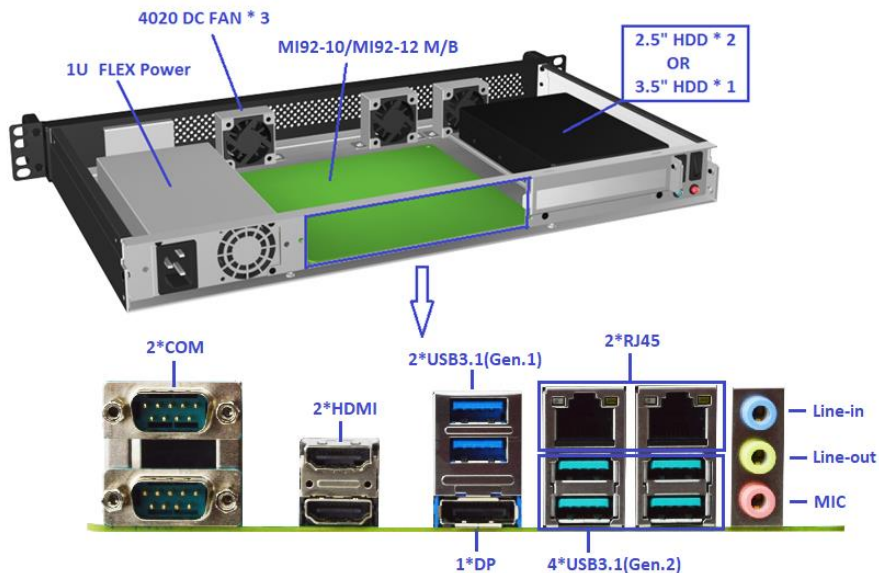

Specifications

Model	CPU / Chipset
<ul style="list-style-type: none">• HBJC150I92-Q470-V (MB model : MI92V10 / Mini-ITX)	Intel® 10th LGA 1200 Socket Core i7/i5/i3/Pentium/Celeron Processor (Max. 65W TDP)
BIOS	Memory
AMI Flash ROM	2* Dual CH non-ECC DDR4 2666/2400MHz SDRAM SO-DIMM up to 64GB
Network	Graphics
<ul style="list-style-type: none">1 * Intel i219LM GbE1 * Intel i225V 2.5GbE	<ul style="list-style-type: none">• Intel® HD Graphics, shared memory, Support Triple Displays• 1* DP (Max Resolution: 4096x2304@60Hz)• 2* HDMI 1.4 (Max Resolution: 4096x2160@30Hz)
Storage	Expansion
<ul style="list-style-type: none">• 2* 2.5" SATA Device (support RAID 0,1)• 1* M.2 M-key 2280 (PCIex4/SATA) support NVME	<ul style="list-style-type: none">1* M.2 E-key (2230, PCIex1/USB2.0 interface) support CNVi1* PCIex16 slot
Rear Panel I/O	Front Panel I/O
<ul style="list-style-type: none">• 2* RJ45• 1* DP, 2* HDMI• 2* COM (RS232/422/485)• 6* USB3.2• 1* LineIN, 1* LineOUT, 1* MIC•	<ul style="list-style-type: none">• 1* Power button, 1* Reset button• 1* Power LED, 1* HDD LED• 2* USB2.0
Internal Connector	Power Source
Onboard TPM 2.0 option	<ul style="list-style-type: none">• 1U FLEX 250W POWER• AC 90~240V input
Compliance	Dimensions
CE, FCC, RoHS, ErP Ready	System: 430 (W) x 252 (D) x 44 (H) mm Color Box dimension: 560 (W) x 400 (D) x 140 (H) mm
Temperature	Part Number Rules
<ul style="list-style-type: none">• Operating Temperature: 0 ~ 50° C• Storage Temperature: -10 ~70° C• Humidity: 10% ~ 90% RH @40°C (non-condensing)	HBJC150I92-Q470-V BB model MB model CHIP model
OS Support	
Windows 11, Linux	
Warranty	
2 Years limited warranty	
* Specifications subject to change without notice, not responsible for typographical errors. Does not include HDD or OS.	

Mechanical Drawings (Unit=mm)

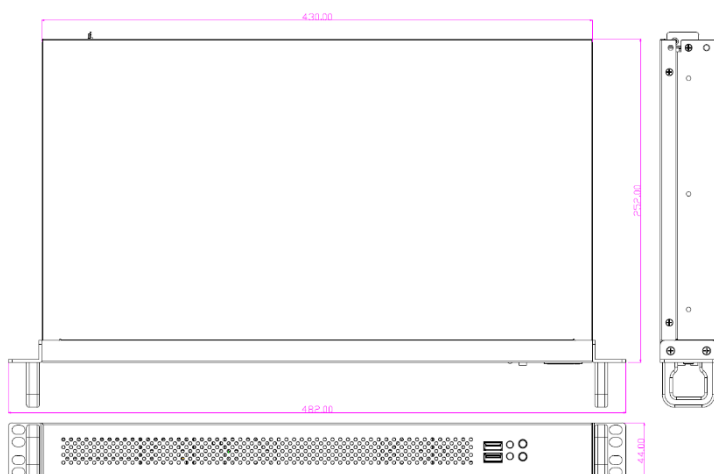

Standard Accessories

Part Number	Description
	HBJC150I92 series
Change according to shipping area	Power cord
LCSCJC150-F	Screw Pack
G01-SATA3-BL-1F	SATA3 CABLE L=50cm
F07-FN959528-F	95*95*28mm CPU FAN
J2PCIE16RISER1AR10	PCI-E X16 RISER CARD